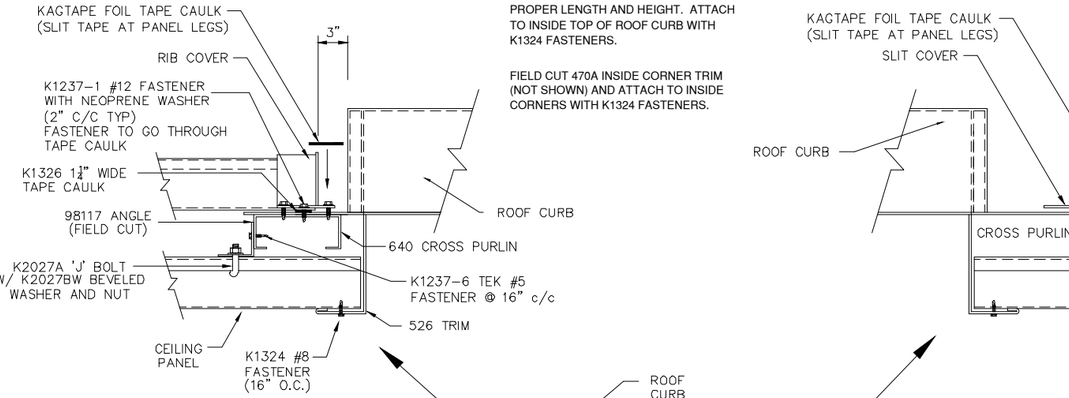

NOTE:
526 TRIM IS TO BE FIELD CUT TO PROPER LENGTH AND HEIGHT. ATTACH TO INSIDE TOP OF ROOF CURB WITH K1324 FASTENERS.

FIELD CUT 470A INSIDE CORNER TRIM (NOT SHOWN) AND ATTACH TO INSIDE CORNERS WITH K1324 FASTENERS.

NOTE:
ATTACH CEILING ANGLE TO PURLIN HANGER WITH K1237-5 #12 FAST. @ 8" C/C. (FIELD CUT AT PURLINS)

SECTION A

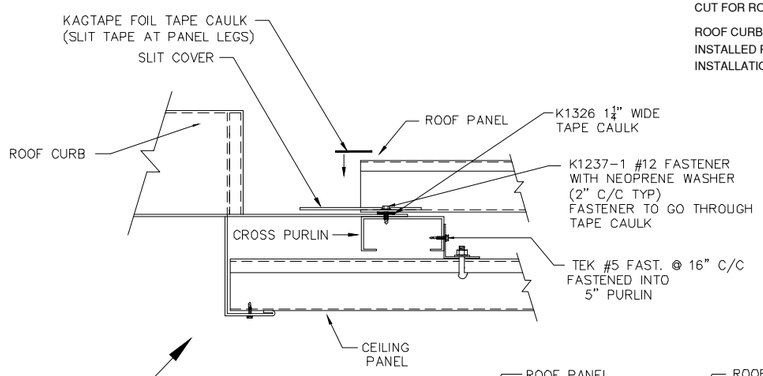

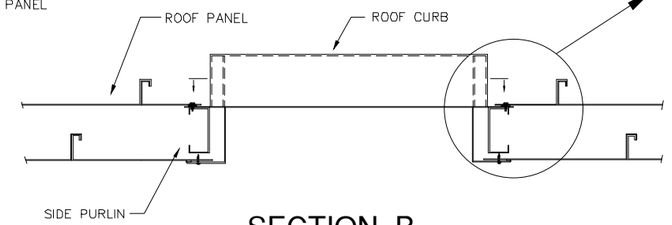

SECTION B

NOTE:
CEILING PANELS MUST BE FIELD CUT FOR ROOF CURB OPENING.

ROOF CURB FRAMING MUST BE INSTALLED PRIOR TO CEILING INSTALLATION.

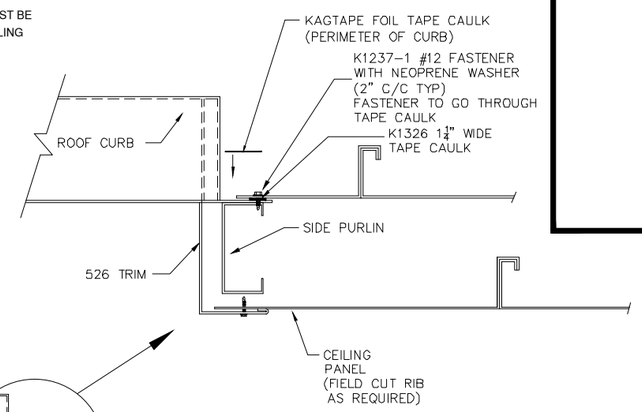

NOTE:
REFER TO DWG.# CURB-S FOR EXTERIOR VIEW AND CUT SECTIONS.

(FULL HT. CEILING)

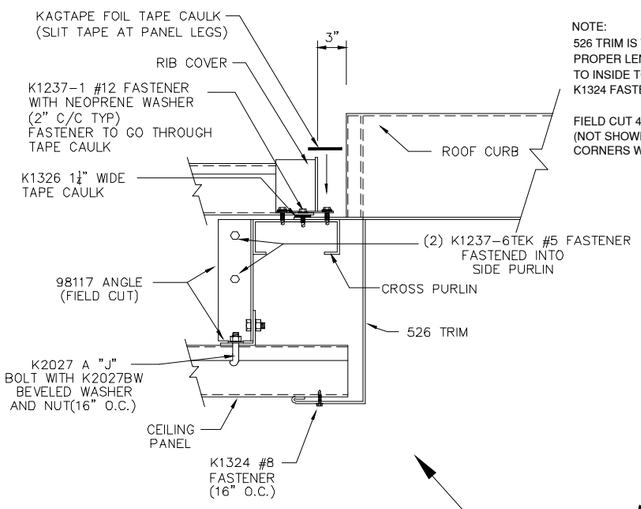

NOTE:
526 TRIM IS TO BE FIELD CUT TO PROPER LENGTH AND HEIGHT. ATTACH TO INSIDE TOP OF ROOF CURB WITH K1324 FASTENERS.

FIELD CUT 470A INSIDE CORNER TRIM (NOT SHOWN) AND ATTACH TO INSIDE CORNERS WITH K1324 FASTENERS.

SECTION A

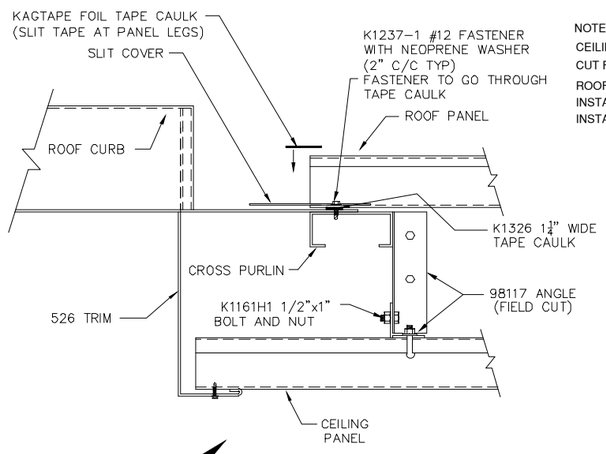

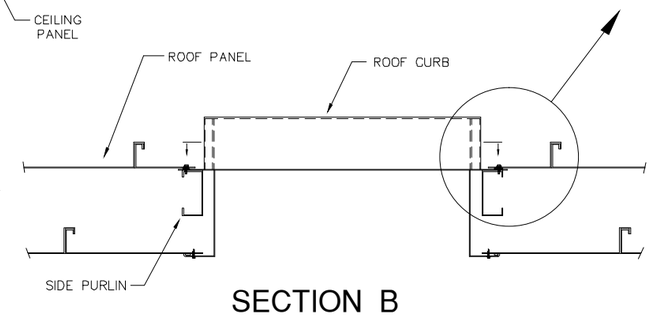

SECTION B

NOTE:
CEILING PANELS MUST BE FIELD CUT FOR ROOF CURB OPENING.

ROOF CURB FRAMING MUST BE INSTALLED PRIOR TO CEILING INSTALLATION.

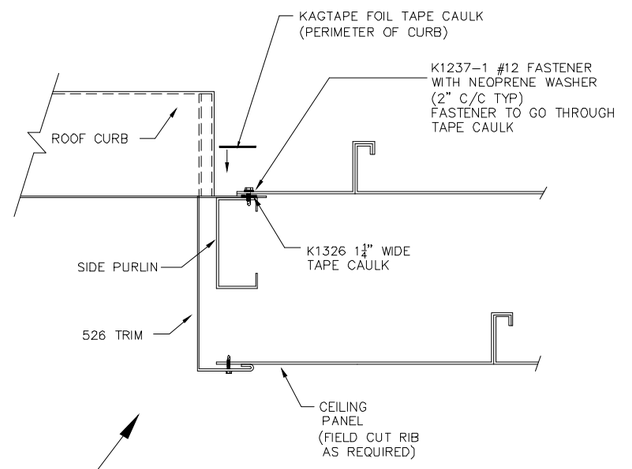

NOTE:
REFER TO DWG.# CURB-S FOR EXTERIOR VIEW AND CUT SECTIONS.

(DROPPED CEILING)

REVISIONS	BY
7-30-96	KAG
11-10-99	DLR
07-31-01	DLR
06-10-03	RAP
01-06-05	WBD
	MYSCALE

PARKLINE, INC.
P O Box 65 Winfield, WV 25213
phone: (304) 586-2113

JOB DESCRIPTION: ROOF CURB WITH CEILING FOR TYPE 'S' AND 'LT' BUILDINGS

SHEET TITLE: SECTIONS

DATE	7-10-96
DRAWN BY	JEH
SCALE	NTS
ORDER NO.	
REVISION	5
DWG. NO.	CURB-SC