

FRAMED OPENING


PRODUCT DESCRIPTION

FRAMED OPENING


Framed openings for overhead doors shall be constructed from nominal 12 gauge galvanized steel. The 8" wide jambs and 12" tall head shall be provided with a minimum 2 1/2" wide inside surface for field mounting of overhead door track and hardware. Jambs and head shall be provided with nominal 24 gauge covers, embossed, painted wall color.

NOTE:


Allow a minimum of 1'-0" head room below eave line for overhead type doors and 2'-0" minimum head room for roll up type doors.

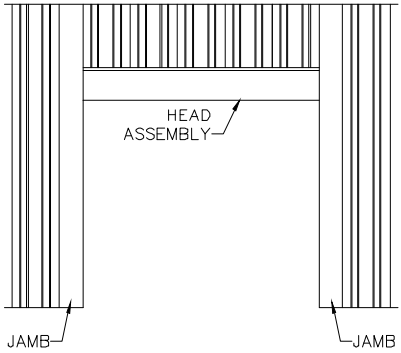

EXTERIOR VIEW

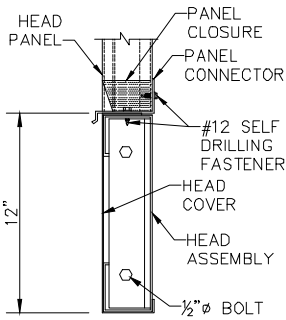

SECTION THRU HEAD

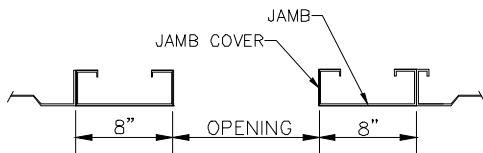

SECTION THRU JAMBS

NOTE:

Refer to Floor Plan and Elevation Drawing for exact size and location of accessories.