


4" THICK BLANKET ROOF INSULATION, S - TYPE BUILDING

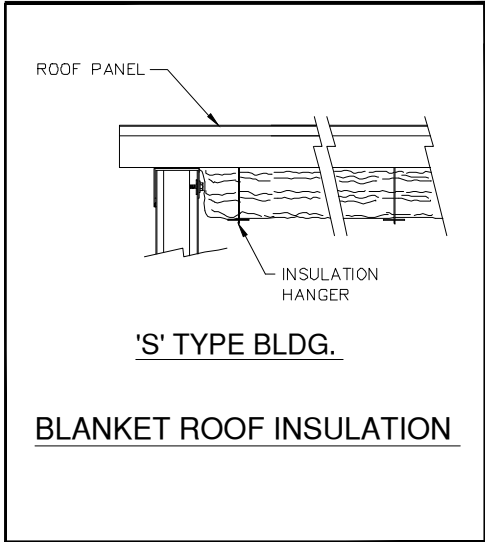

PRODUCT DESCRIPTION

**BLANKET ROOF INSULATION
4" THICK**

Roof insulation shall consist of 48" wide, 4" thick, 6# density fiberglass faced on its exposed side with a white metalized polypropylene scrimkraft facing. The faced insulation material shall have a UL Flame Spread Rating of 25 when tested in accordance with UL 723 ASTM E 84 procedures.

Insulation shall be supported at the roof line by means of mechanical clips spaced on maximum 4'-0" Centers and shall be sealed by means of 2" side tab on facing.

SYSTEM VALUES		R
4" Thick	Continuous	13.2

Calculated system "U" value 0.08 (ASHRAE zone method)