

HOLLOW METAL DOOR LEAVES

PRODUCT DESCRIPTION

DOOR LEAVES

Door leaves shall be 1³/₄" thick, flush construction of a nominal 20 gauge galvanized steel, reinforced by lamination to a small cell honeycomb core. Leaves shall be manufactured in accordance with ANSI/SDI-100, Grade 1, Model 1. - Standard leaves have an STC rating 30 and U value .41

- a) - (Type S) - Solid Panel
- b) - (Type NL) - Narrow lite, top with 5" x 30", solid bottom.
- c) - (Type VL) - Vision Lite, top with 10" x 10", solid bottom.
- d) - (Type HG) - Half glass, top open for glazing, solid bottom, Nominal glass sizes:
 2470 - 12" x 30"
 3070 - 20" x 30"
 3870 - 28" x 30"
 4070 - 28" x 30"

GLAZING OPTIONS


- 1/4" Acrylic
- 1/4" Polished Wire
- 3/4" Insulated
- 1/4" Polycarbonate
- 1/4" Tempered

DOOR FINISH

All leaves and frames shall be factory painted with one coat of baked on primer.

DOOR OPTIONS

- a) - Insulated, foamed-in-place, rigid, closed cell polyurethane core chemically bonded to 18 gauge galvanized steel face sheets.
 - Insulated leaves have an STC rating of 26 and a U value of .07.
- b) - Factory painted.
- c) - 16 gauge galvanized steel leaves.
- d) - Fire rated doors.

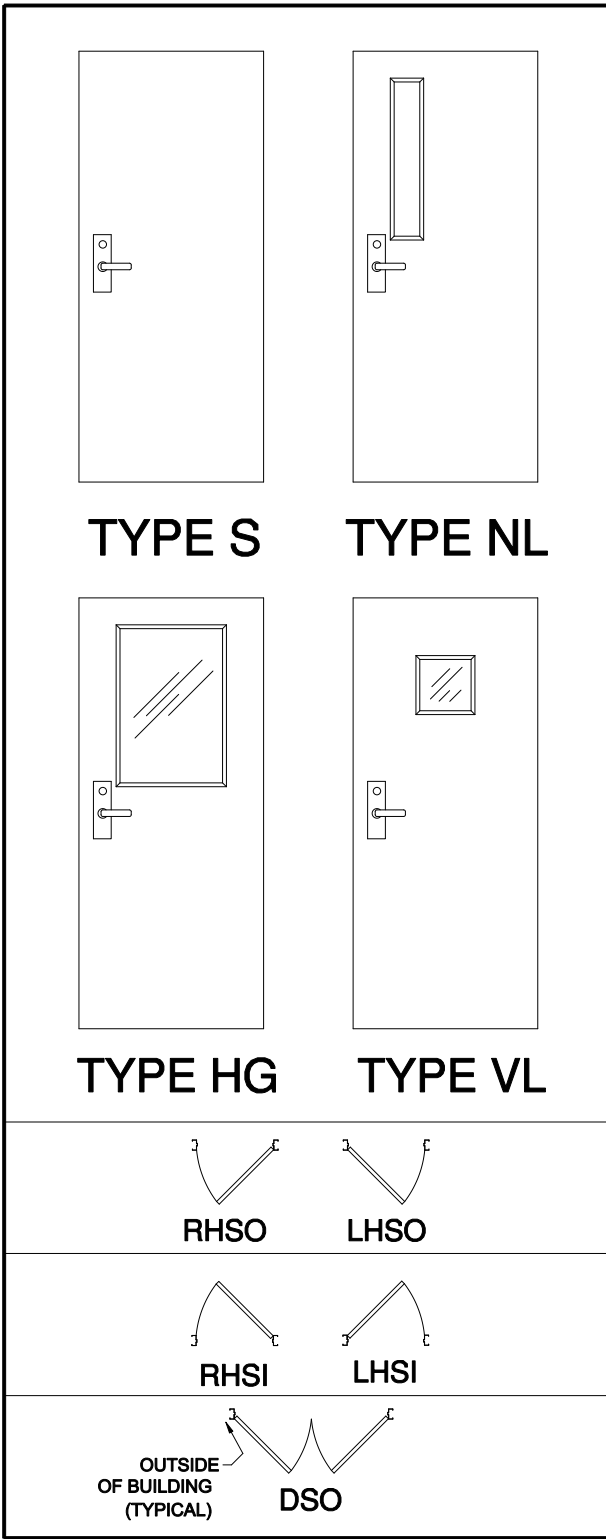

TYPE S

TYPE NL

TYPE HG

TYPE VL

RHSO

LHSO

RHSI

LHSI

OUTSIDE OF BUILDING (TYPICAL)

DSO

PRODUCT NAME

Hollow Metal Door Leaves

MANUFACTURER

Parkline, Inc.

P.O. Box 65

Winfield, West Virginia 25213

Phone: (304) 586-2113 in WV

(800) 786-4855 outside WV

(304) 586-3842 FAX

web: <http://www.parkline.com>

E-mail: parkline@parkline.com

 PARKLINE, INC.

13122 HMD 2