

# HOLLOW METAL DOOR LEAVES

## PRODUCT DESCRIPTION

### DOOR LEAVES

Door leaves shall be 1<sup>3</sup>/<sub>4</sub>" thick, flush construction of a nominal 20 gauge galvanized steel, reinforced by lamination to a small cell honeycomb core. Leaves shall be manufactured in accordance with ANSI/SDI-A250.8 Standard duty, level B. - Standard leaves have an STC rating 30 and U value .41

- a) - (Type S) - Solid Panel
- b) - (Type NL) - Narrow lite, top with 5" x 30", solid bottom.
- c) - (Type VL) - Vision Lite, top with 10" x 10", solid bottom.
- d) - (Type HG) - Half glass, top open for glazing, solid bottom, Nominal glass sizes:  
 2470 - 12" x 30"  
 3070 - 20" x 30"  
 3870 - 28" x 30"  
 4070 - 28" x 30"

### GLAZING OPTIONS


- 1/4" Acrylic
- 1/4" Tempered
- 1/4" Polycarbonate
- 3/4" Insulated

### DOOR FINISH

All leaves and frames shall be factory painted with one coat of oven cured primer.

### DOOR OPTIONS

- a) - Insulated, foamed-in-place, rigid, closed cell polyurethane core chemically bonded to 18 gauge galvanized steel face sheets (heavy duty level - A).  
 - Insulated leaves have an STC rating of 26 and a U value of .09.
- b) - Factory painted.
- c) - 16 gauge galvanized steel leaves.
- d) - Fire rated doors.

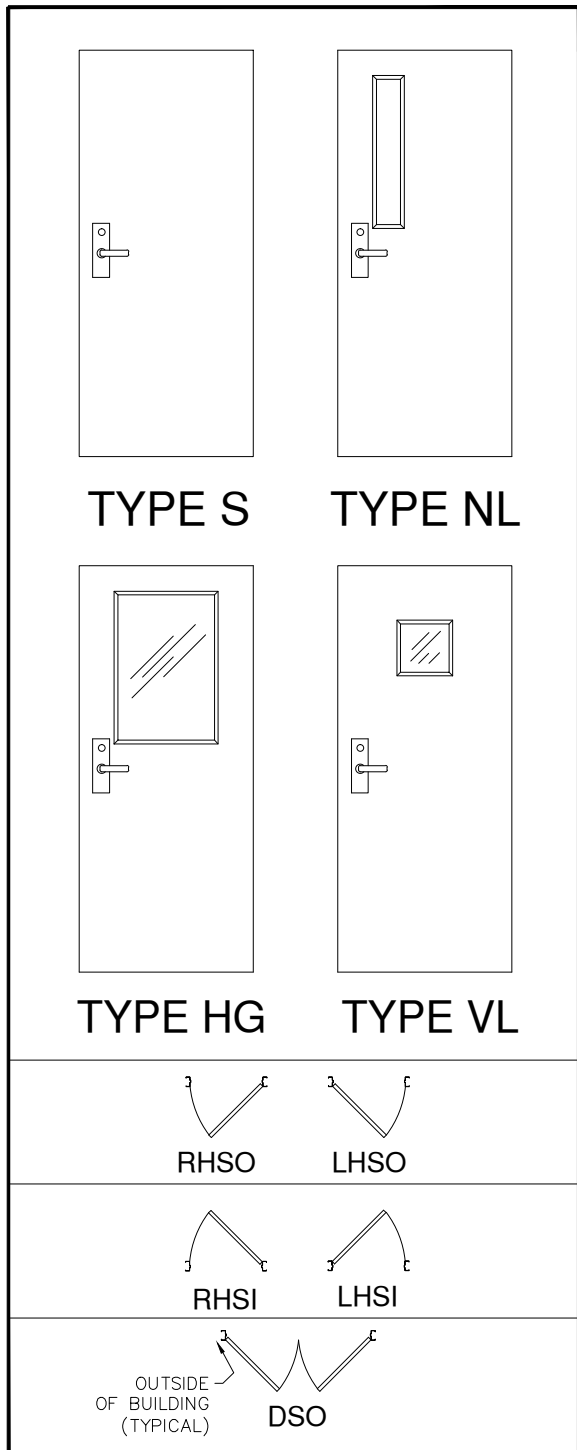

## PRODUCT NAME

Hollow Metal Door Leaves

## MANUFACTURER

Parkline, Inc.  
 P.O. Box 65  
 Winfield, West Virginia 25213  
 Phone: (304) 586-2113 in WV  
 (800) 786-4855 outside WV  
 (304) 586-3842 FAX

web: <http://www.parkline.com>  
 E-mail: [parkline@parkline.com](mailto:parkline@parkline.com)

 **PARKLINE, INC.**  
**13122 HMD2**